
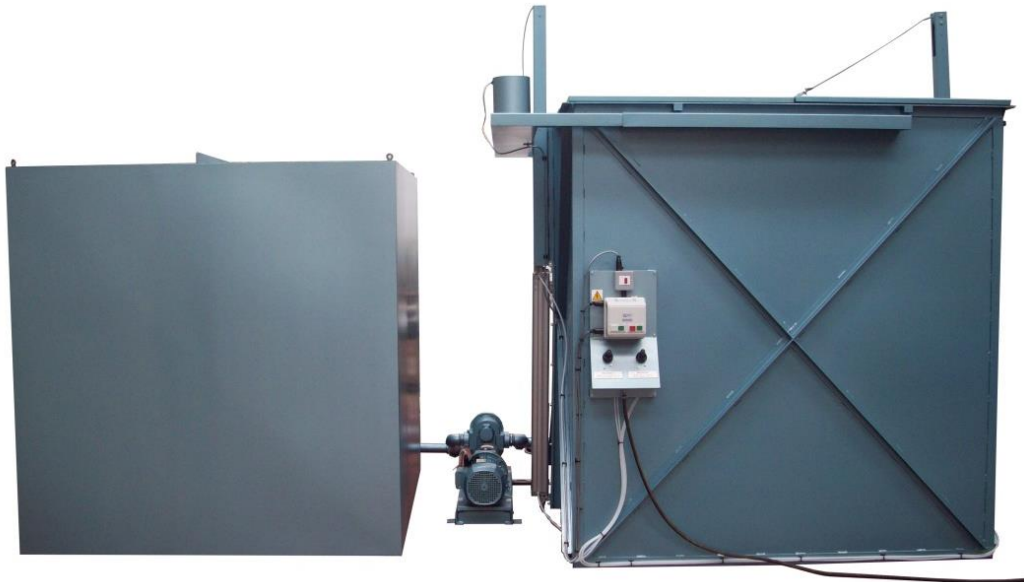


Varnish Tank (Large)

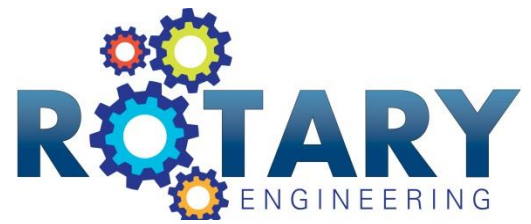

The motorised Varnish Tank from Rotary Engineering UK Ltd offers a safe and clean way for the smaller repair workshop to impregnate windings. Suitable for use with a wide range of propriety varnishes including trickle and water based types.

Featuring a two tank system, one for soak and one for storage, this equipment reduces solvent losses and maintains your varnish in good condition.

The pump, motors and electrical controls are ATEX rated and the lid and the extraction ducting minimises the build-up of fumes. In case of fire the lids will automatically close.

MACHINE FEATURES AND OPERATION

- Minimises valuable overhead crane time.
- Safety protection - by means of 2 drop down lids (operated by a fused link) in case of fire.
- Extraction system reduces in internal solvent fumes.
- A sealed storage tank reduces solvent loss and maintains varnish in peak condition.
- The VT20 varnish tank is supplied with the immersion tank to one side of the storage tank.

The job is lowered into the tank, the lid closed, varnish is then pumped from the lower tank. After the soak time has elapsed the varnish is then pumped back to the storage tank and the job removed.

Varnish Tank (Large)

SPECIFICATION

OVERALL DIMENSIONS		Immersion Tank	Storage Tank mm
Internal tank dimensions			
Width (mm)		2,000	1,874
Depth (mm)		2,000	1,874
Height (mm)		1,910	1,874
Overall dimensions			
A	Width	2,110	1,880
B	Depth	2,110	1,880
C	Height	2,150	2,150
D	Overall Height	2,775	1,880
Tank capacity (litres)		7,650	6,500
Extractor Fan Motor		220 V / 240 V 1 Phase 50Hz 5 Amp	
Pump Motor		380V / 415 V 3 Phase 50Hz / 60Hz 10Amp	
Pump Flow Rate		220 litres per minute	

All weights / dimensions and capacities are approximate and given as a guide only

